


Finish: Article Number: 16180180




product features

- · TÜV certified
- · suitable for infrared wall spout
- · connection dimension: DN20
- · maximum flow rate at 3 bar: 5 l/min
- · minimum mounting depth: 80 mm
- · maximum mounting depth: 108 mm



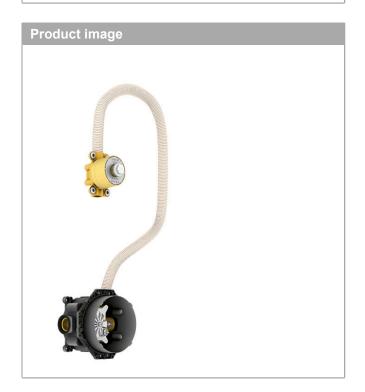


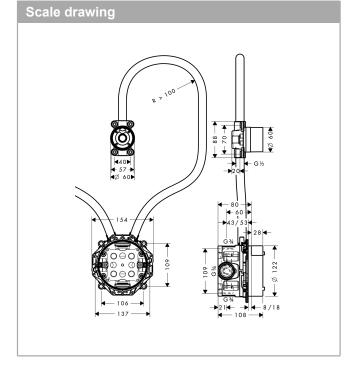



Finish: Article Number: 16180180




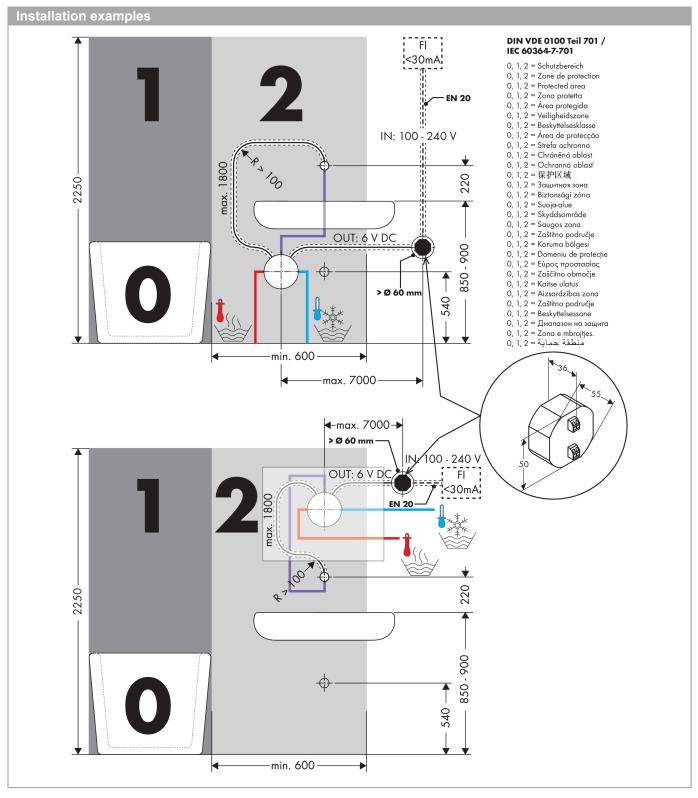



Finish: Article Number: 16180180



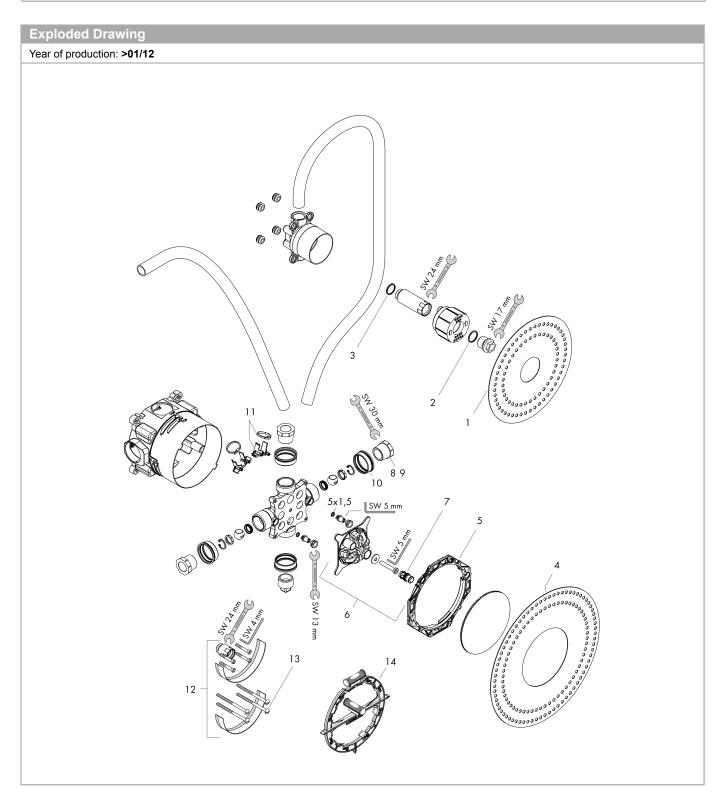



Finish: Article Number: **16180180**



Spare	part list			
Year of	production: >01/12			
Pos.		Article Number	PC	PU
1	sealing foil	96493000	3	1
2	O-ring 18x2	98181000	2	1
3	O-ring 17x1,5	98137000	1	1
4	sealing foil	96445000	3	1
5	displacing ring	98797000	9	1
6	flushing unit complete	98560000	10	1
7	plug Ø 12 mm	97611000	4	1
8	reduction coupling	97759000	5	1
9	reduction coupling	97759980	11	1
10	seal	97739000	1	1
11	adapter for wiring conduit	95260000	2	1
12	extension 25 mm	13594000	99	1
13	set of fixing screws	97747000	1	1
14	fit-up aid	93500000	99	1