

AXOR One
Thermostatic module for concealed installation for 2 functions
 Finish: **Chrome** Article Number: **45712000**



product features

- 2 functions and 1 additional outlet
- simultaneous use of several outlets
- comfortable turning on / off of outlets with large Select-paddle
- Eco-Function: flow rate regulation via lever handle, depending on volume flow and installation situation approx. 50% flow rate reduction
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 30 l/min
- flow rate per outlet: 24 l/min
- flow rate by simultaneous use of all outlets: 30 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 5 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- the thermostat offers the possibility for thermal disinfection
- non-return valve
- connection type: basic set
- thermostat is delivered with buttons hand shower and Rain large

Technology



Certificates / Sustainability




AXOR One
Thermostatic module for concealed installation for 2 functions
 Finish: **Chrome** Article Number: **45712000**




Product image



Scale drawing

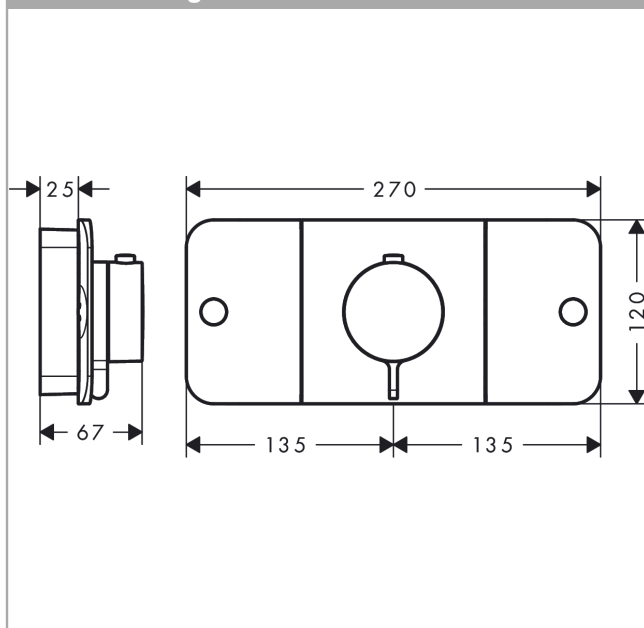

Flowchart

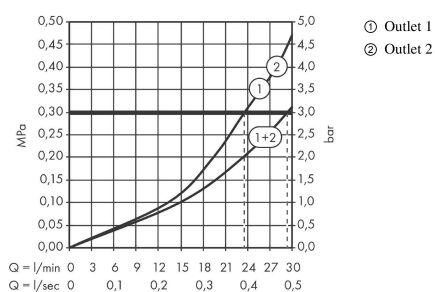

AXOR One


Thermostatic module for concealed installation for 2 functions

Finish: **Chrome** Article Number: **45712000**



Exploded Drawing

Year of production: >10/15

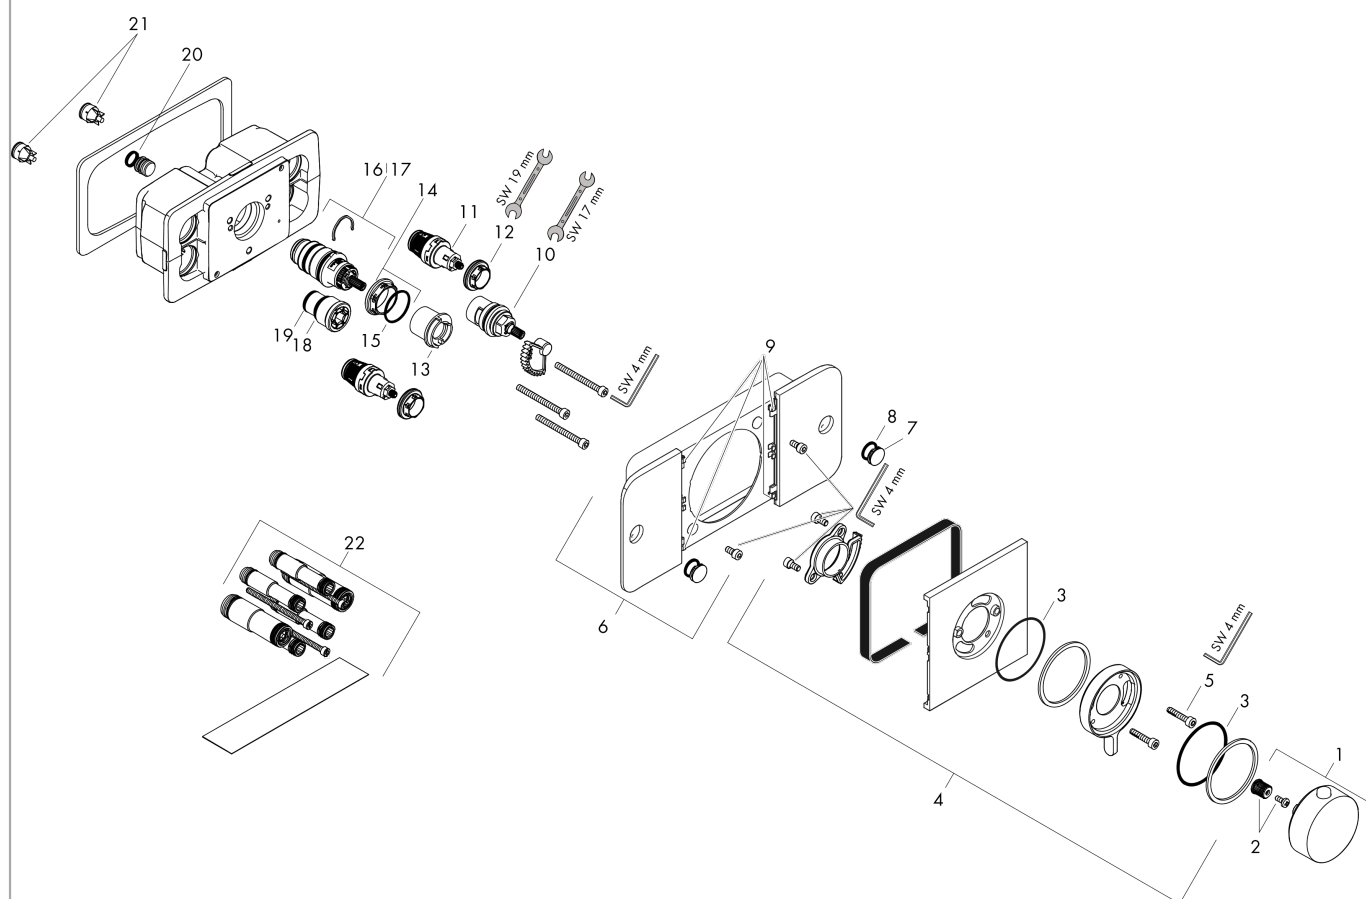

AXOR One
Thermostatic module for concealed installation for 2 functions
 Finish: **Chrome** Article Number: **45712000**



Spare part list

Year of production: >10/15

Pos.		Article Number	PC	PU
1	handle for thermostat	92600000	15	1
2	handle fixing set	98932000	5	1
3	O-ring 57x2	98210000	1	1
4	escutcheon	92599000	15	1
5	hexagon socket screw M5x25	97664000	1	1
6	control panel	92612000	20	1
7	set of symbols	92541000	14	1
8	O-ring 13x2	98128000	1	1
9	set of lever collars	93121000	1	1
10	shut off unit	98536000	12	1
11	shut off unit	95758000	14	1
12	nut	98368000	4	1
13	safety set	92614000	8	1
14	nut	98913000	6	1
15	O-ring 26x1,5	98390000	1	1
16	thermostat cartridge	98282000	14	1
17	cartridge for exchanged connections	92373000	18	1
18	O-ring 21x1,5	98219000	1	1
19	O-ring 17x1,5	98137000	1	1
20	O-ring 11x2	98127000	1	1
21	non return valve (pressure-resistant up to 2 MPa)	92594000	5	1
22	extension 25 mm	45790000	99	1
a	base body	45710180	99	1